SYSTEM 5600 2-1/4" CURTAIN WALL

Outside Glazed • 2 or 4-sided Structural Glazed
EFCO 2 1/4" system 5600 provides a monumental sight line and is available in a wide range of mullion and face cover depths. The 2 1/4" 5600 pressure wall has roll-on horizontals and concealed fasteners for a smooth uninterrupted joinery. Also Available for enhanced thermal performance and fewer installation steps is a fiberglass pressure plate.

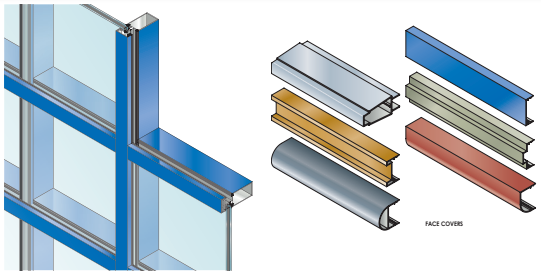

STRUCTURAL LOAD (ASTM E330) VISIT EFCOCORP.COM	**WATER RESISTANCE** (ASTM E547 & E331) CAPTURED: 15 PSF TARGET
AIR INFILTRATION (ASTM E283) CAPTURED: <0.06 CFM/FT^2	**CRF** (AAMA 1503) DURACAST: 74 SSG: 61
U-FACTOR* (ANSI/NFRC 100/200) DURACAST: 0.29 - 0.51 ALUMINUM: 0.37 - 0.59 SSG: 0.29 - 0.52	**OITC*** (ASTM E90 & E413) DURACAST: 30
STC* (ASTM E90 & E413) DURACAST: 34 - 36	

STANDARD FEATURES

- Thermal isolator used between exterior and interior extrusions
- Various mullion depths
- Wide variety of snap-on face covers
- Optional corner mullions
- Concealed shear block construction
- Concealed vents
- Integral door adaptors
- Accommodates up to 1-5/16" glazing
- Accessory line of perimeter anchors, pocket fillers, door adaptors, etc.
- Anodized and painted finishes available
- Roll-on horizontals

* Performance dependent on glass selection. Please contact your EFCO sales rep for project specific performance.