



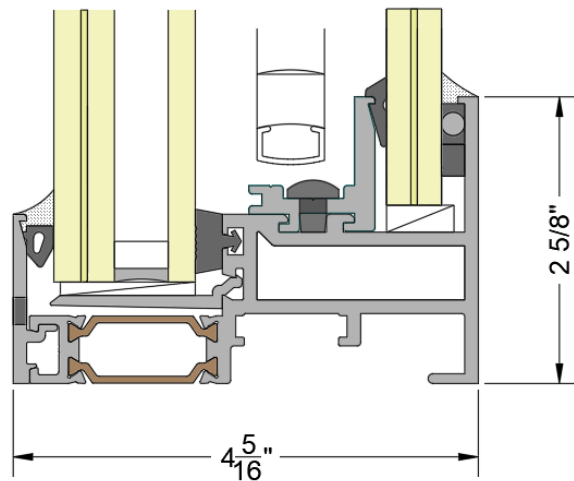

Features

- ✓ 4" & 4 5/16" frame depth with polyamide nylon thermal barrier
- ✓ "Drop tested" per AAMA 501.8 for interior and exterior human impacts up to 2000 ft-lbs
- ✓ Used on New York State Office of Mental Health (NYSOMH) projects, to offer a secure, yet homelike environment
- ✓ AAMA AW air, water, and structural performance
- ✓ Coped and fastened corners on M/F stackable units
- ✓ Mitered and corner-blocked frame construction
- ✓ Mechanically-fixed infill retainers accept a variety of security glazing materials
- ✓ Perimeter Starter System or formed steel strap anchors available
- ✓ 1/8" principal wall thickness
- ✓ Triple glazed
- ✓ 5/8" or 1" between-glass Venetian blinds available
- ✓ Interior or Exterior installation available
- ✓ Recycled aluminum framing available upon request

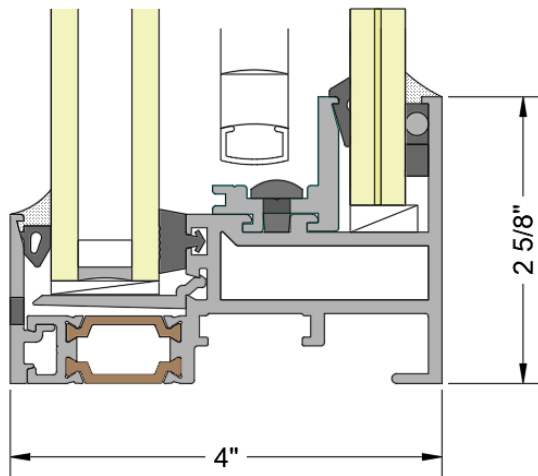

Performance

Allowable Air
0.10 cfm/sqft at 6.24 psf
Water
15.0 psf
NFRC U-Factor
0.35 BTU/hr.sqft.°F
CRF_r
67
STC-OITC
47-40 1 11/32" IGU & 1/2" PC
46-34 1" IGU & 1/2" PC

DISCLAIMER: Wausau Window and Wall Systems takes no responsibility for product selection or application, including, but not limited to, compliance with building codes, safety codes, laws, merchantability or fitness for a particular purpose; and further disclaims all liability for the use, in whole or in part, of this Technical Guide in preparation of project specifications and/or other documents. Technical Guides are subject to change at any time, without notice, and at Wausau's sole discretion. ©2026 Apogee Architectural Metals.